



icmr
INDIAN COUNCIL OF
MEDICAL RESEARCH
Serving the nation since 1911

NIV
NATIONAL INSTITUTE
OF VIROLOGY

आई सी एम आर - राष्ट्रीय विषाणु विज्ञान संस्थान

स्वास्थ्य अनुसंधान विभाग
स्वास्थ्य एवं परिवार कल्याण मंत्रालय, भारत सरकार

ICMR - NATIONAL INSTITUTE OF VIROLOGY

Department of Health Research
Ministry of Health & Family Welfare, Govt. of India

PP no. 182/NIV-Purchase/2023-24

IInd Enquiry

Dt. 31st Oct, 2023

QUOTATION ENQUIRY

Sealed quotations are invited on behalf of the Director, ICMR-National Institute of Virology, Pune for "Dismantling RCC Staircase..." Interested vendors should submit their quotation along with their company/personal profile and details given below:

Sl. No	Job Work	Qty. Required	Remarks
1	Dismantling RCC Staircase...	1	Specifications & Drawing copy attached (For Details visit site at ICMR NIV, MCC 130/1, Sus Road, Pashan, Pune - 411021).


The quotation super scribed as "PP no. 182 (Dismantling RCC Staircase" addressed to the Director, ICMR-National Institute of Virology, 20-A, Dr. Ambedkar Road, P.B. No.11, PUNE -411 001. (Attention : Administrative officer - Stores), should be either dropped at the Stores Department at NIV Pune or sent through Speed Post/Courier latest by 21st Nov, 2023 till 5.00 p.m.

OTHER TERMS & CONDITIONS

1. This is an enquiry and must not be treated as an order.
2. Proper Quotation on Firm Letter Head, other than letter head quotation will be rejected.
3. The NIV, Pune office reserves the right to accept or reject any or all applicants without assigning any reasons.
4. Any decision taken by the Director, NIV Pune at any point of time in connection with this process shall be final and conclusive and no claim or dispute from any quarter in that regard shall be entertained.
5. No advance payment will be made. The payment will be made on receipt of services availed and satisfactory report of the end users.
6. NIV, Pune will not be responsible for any delay for receipt of quotations.
7. Requirement of Dismantling RCC Staircase... will either increase or decrease final requirement will be mentioned in the P.O order issued to the firm.


Administrative Officer

MS Staircase for AC Plant

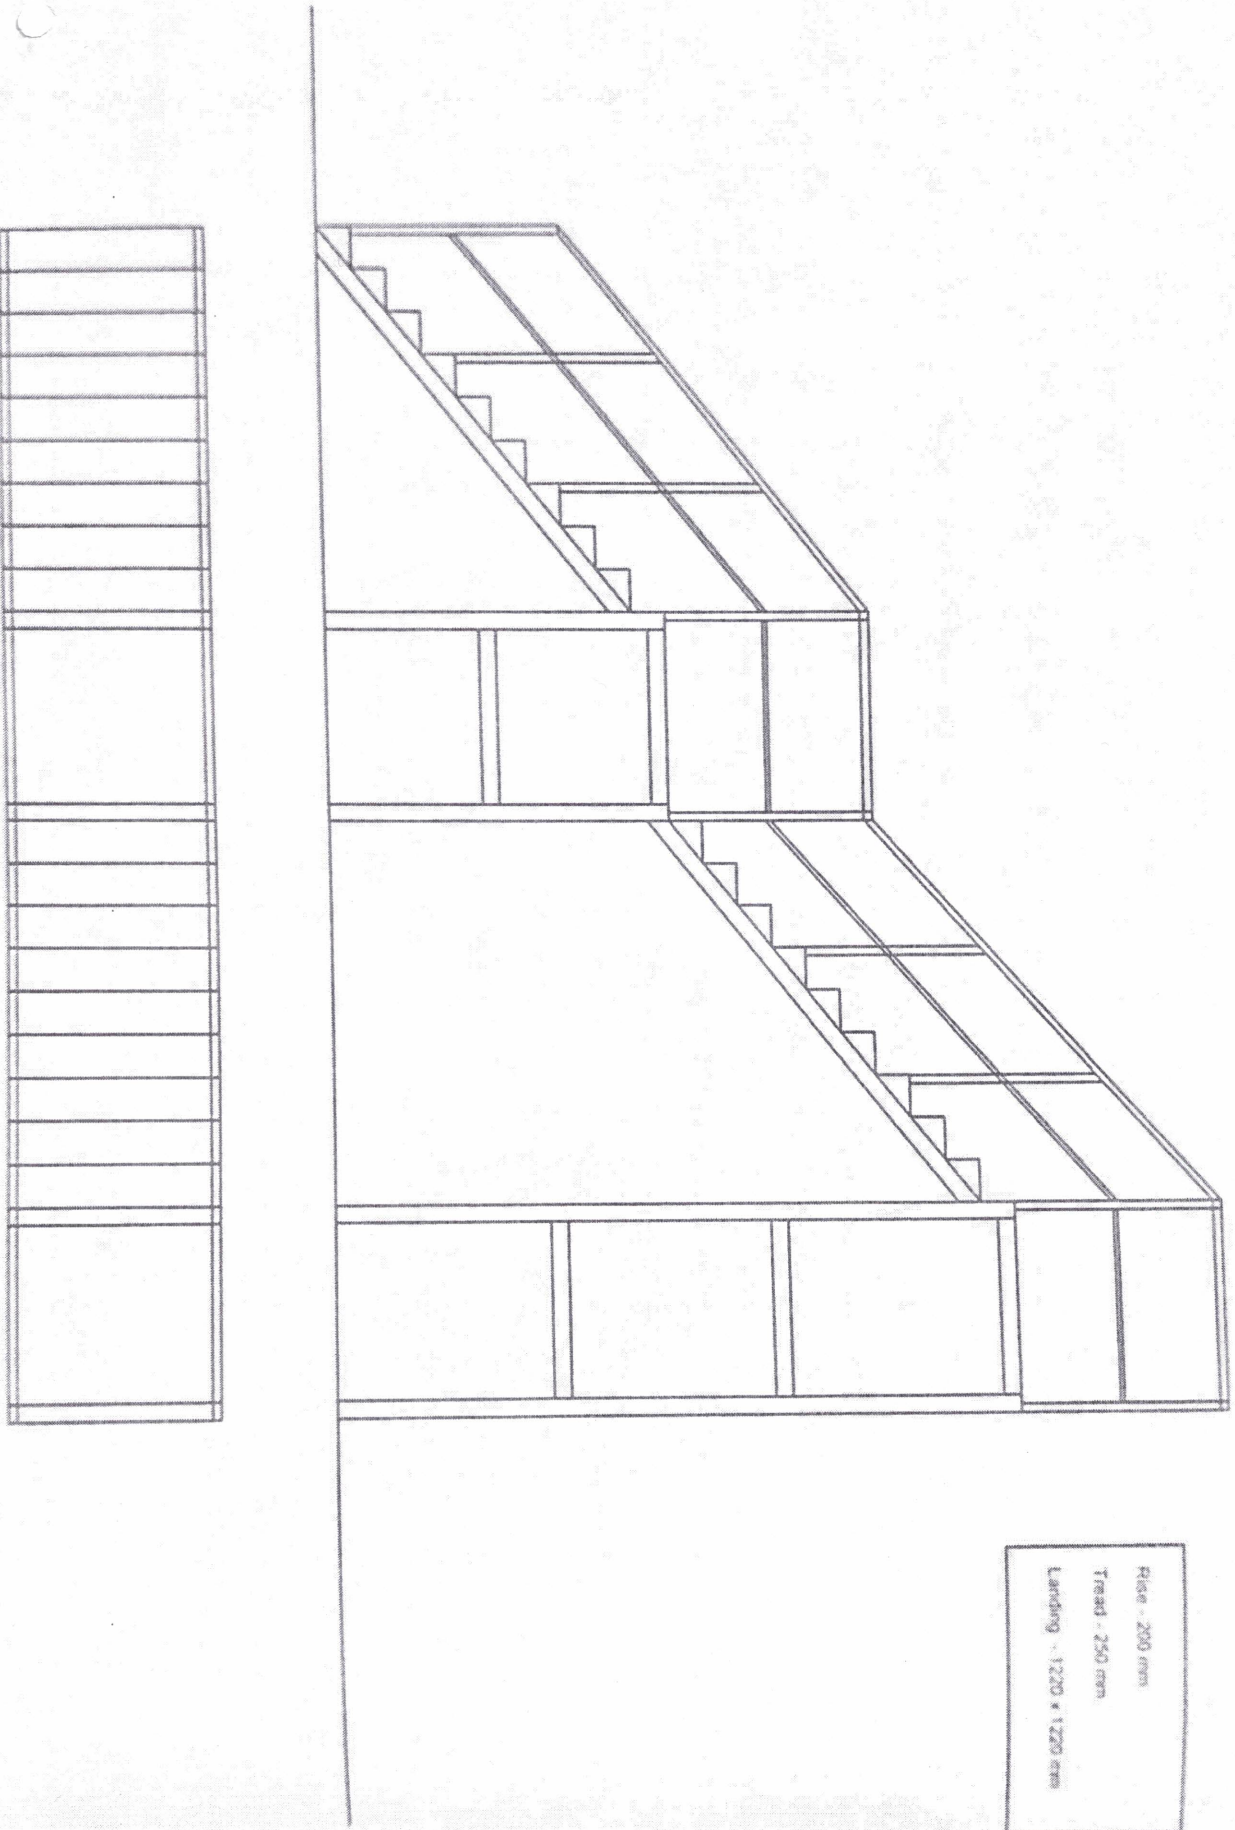



ICMR-National Institute of Virology, Pune

Details for Providing and fixing MS staircase to AC Plant

Sr No	Work	Approx Required quantity
1	Dismantling the existing RCC Staircase and Disposal of debris (As per site conditions)	Lump sum
2	Repair and cement plastering of exterior wall	Lump sum
3	External painting of wall to achieve even surface and paint	Lump sum
4	Providing and fixing MS Staircase 1. Width of staircase-1.22 m Landing-1220 x 1220 mm 2. No of Steps-20 Nos, Riser-200 mm, Tread-250 mm. 3. No of Landings-2 Nos 4. No of Railings-2 Nos (Top Rail-50 mm dia Pipe, Middle Rail-25 mm dia Pipe, Vertical Rail supports - 50 mm dia Pipe) 5. Waist slab-100 x 6 Angle. Bottom support -100 x 6 Angle. Landing- 100 x 6 Angle, Vertical Box support - 100 x 6 Angle, Tread-50 x 6 angle and 30 x 5 flat, Base Plate 300 x 300 x 8 mm 6. With one coat Red oxide and two coat oil paint to structure. 7 All including nails, hold fast etc	Job Work

Note:

- 1 Please visit site before submitting quote
- 2 Consider only branded material available in market.
3. Quality of material & specifications must be approved by engineer in charge
4. Cost of dismantling, removing and disposal must be considered in quote